Class D23
Heating Equip.
Box I

WESIX

IONIX WALL CONVECTORS

SERIES CIX

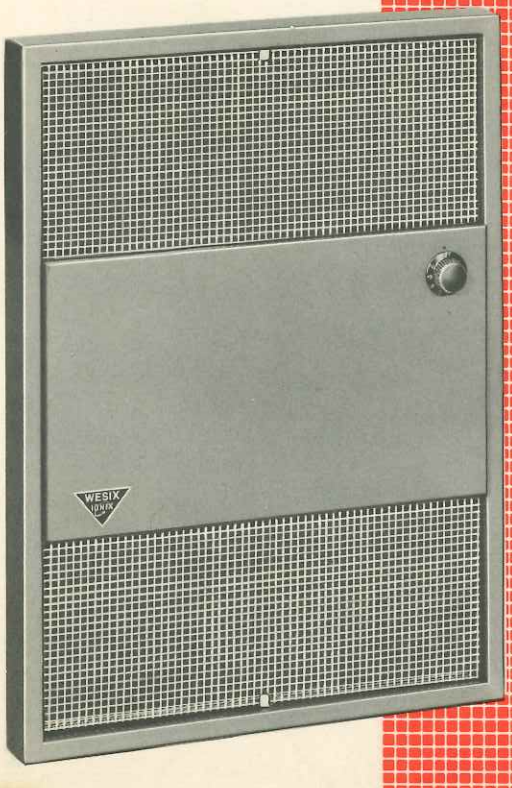

For the finest comfort your heating dollar can buy, Wesix Wall Convectors assure fresh, clean air with natural ion-balance for freedom from allergy symptoms. Exclusive Wesix-Ionix feature destroys airborne bacteria, keeps room air 90% germ free.

This stylish convector is especially useful where furniture must be placed near the heater. Surface temperature of the front panel is comfortably low yet efficient natural circulation provides maximum heat with minimum use of wall space.

Guaranteed 10 years against burnout.

Listed and approved by Underwriters' Laboratories, Inc.

RETURN TO
DESIGN DIV.

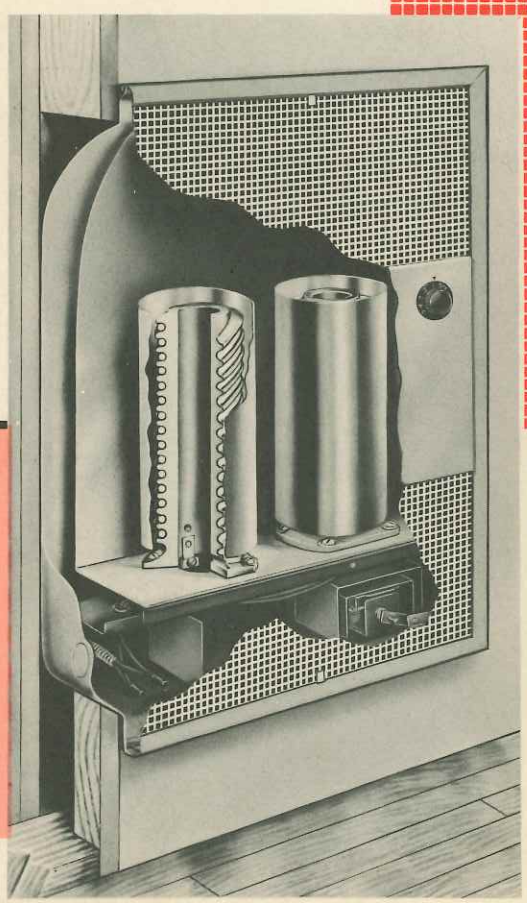

SPECIFICATIONS

Catalog No.	Watts	Shipping Wt.	Width of Wall Opening (Inches)	Height of Wall Opening (Inches)	Width of Heater Overall	Height of Heater Overall
15CIX	1500	22 lb.	9⅞	20¼	12½	23
20CIX	2000	27 lb.	14¼	20¼	16¾	23
25CIX	2500	27 lb.	14¼	20¼	16¾	23
30CIX	3000	35 lb.	22¾	20¼	25¼	23
40CIX	3750	35 lb.	22¾	20¼	25¼	23

Standard finish: Driftwood
Standard voltage: 240-250 AC.
Heater depth: 4"

To order for surface mounting, add catalog suffix "S".

WESIX ELEC. HEATER CO.
RECEIVED 7/15/60

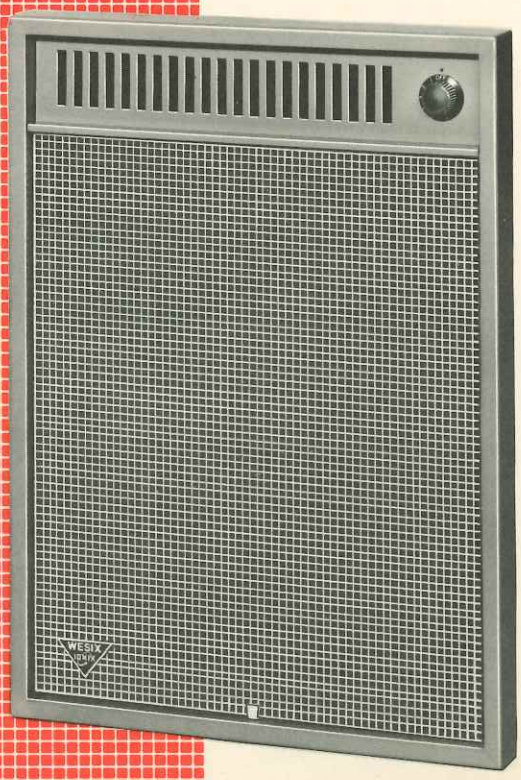

RADIANT CONVECTION IONIX HEATERS

SERIES WIX

The "comfort standard of the heating industry" these handsome units bring a perfect balance of gentle, warm-air circulation and the penetrating warmth of infra-red radiant heat plus the modern scientific miracle of Ionix "ion-control" to end asthma and hay fever symptoms for thousands and bring better health and comfort to all. Gone are oppressive, stuffy winter days so common with old-fashioned heating systems —now enjoy instead the brisk freshness of really-clean, "ion-balanced" air.

Guaranteed 10 years against burnout.

Listed and approved by Underwriters' Laboratories, Inc.

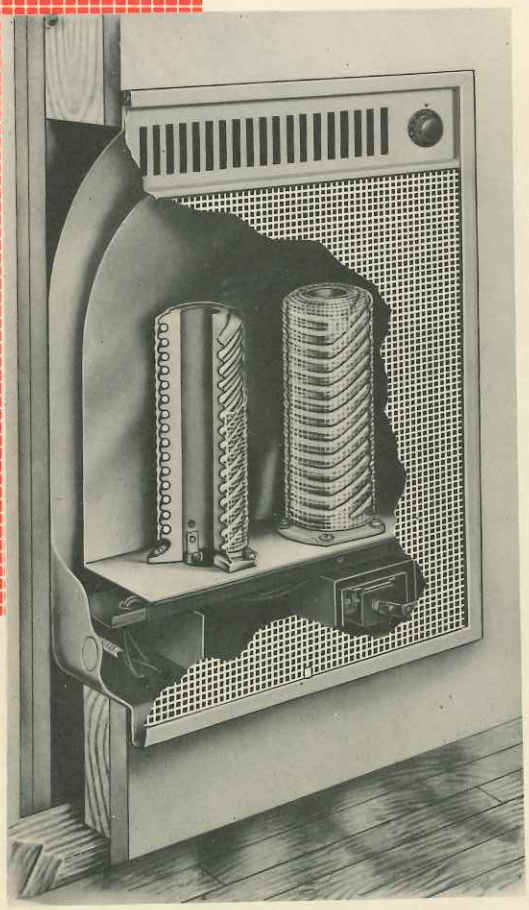

SPECIFICATIONS

Catalog No.	Watts	Shipping Wt.	Width of Wall Opening (Inches)	Height of Wall Opening (Inches)	Width of Heater Overall	Height of Heater Overall
15WIX	1500	16 lb.	9⅞	20¼	12½	23
20WIX	2000	22 lb.	14¼	20¼	16¾	23
25WIX	2500	22 lb.	14¼	20¼	16¾	23
30WIX	3000	30 lb.	22¾	20¼	25¼	23
40WIX	3750	30 lb.	22¾	20¼	25¼	23

Standard finish: Driftwood
Standard voltage: 240-250 AC.
Heater depth: 4"

To order for surface mounting, add catalog suffix "S".

Providing all the known requirements for health and comfort in a heating system, Wesix-Ionix wall heaters:

- Filter out excessive positive ions!
- Bring room air into electrostatic balance!
- Destroy airborne bacteria and virus!
- Eliminate mold and pollen particles!
- Provide healthful radiant heat plus
- Gentle, positive draft-free circulated heat

FORCED AIR HEATERS

SERIES DF

Where forced air heating is desirable, such as in the kitchen, laundry, or game room, Wesix provides the ultimate in modern decorator design plus quiet, trouble-free operation for year after comfortable year. Two, easy to read, fingertip-level controls provide (1) summer air circulation (2) continuous fan operation with thermostatically controlled heat, or (3) fan and heat *both* cycling with the thermostat for winter operation. Warranted against mechanical or electrical defects for one year and guaranteed five years against element burnout.

Listed and approved by Underwriters' Laboratories, Inc.

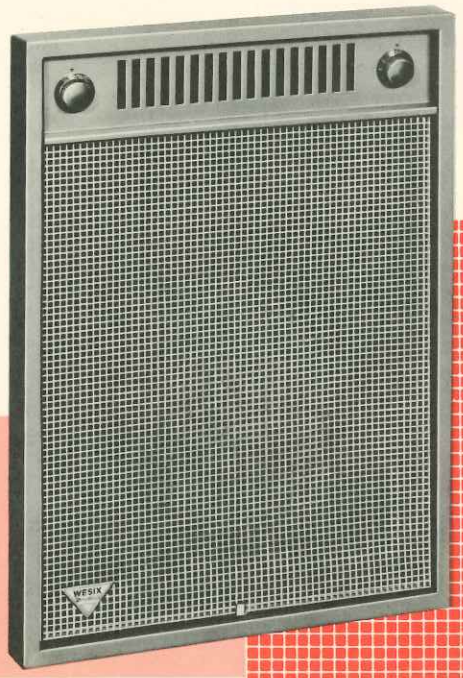

SPECIFICATIONS

Catalog No.	Watts	Shipping Wt.	Width of Wall Opening (Inches)	Height of Wall Opening (Inches)	Width of Heater Overall	Height of Heater Overall
30DF	3000	25 lb.	14¼	20¼	16¾	23
40DF	4000	25 lb.	14¼	20¼	16¾	23
50DF	4800	25 lb.	14¼	20¼	16¾	23

Standard finish: Driftwood
Standard voltage: 240-250 AC.
Heater depth: 4″ To order for surface mounting, add catalog suffix "S".

STANDARD WALL HEATERS

SERIES WFR

Handsome, compact units well suited to many residential, commercial and institutional applications, standard Wesix Wall Heaters assure a high level of heating comfort plus the handsome Wesix "new look" —the soft brown gray of the Driftwood frame—the crisp clean white of the grille—the rich red control knob set off by the sparkling gold base panel.

Guaranteed 10 years against burnout.

Listed and approved by Underwriters' Laboratories, Inc.

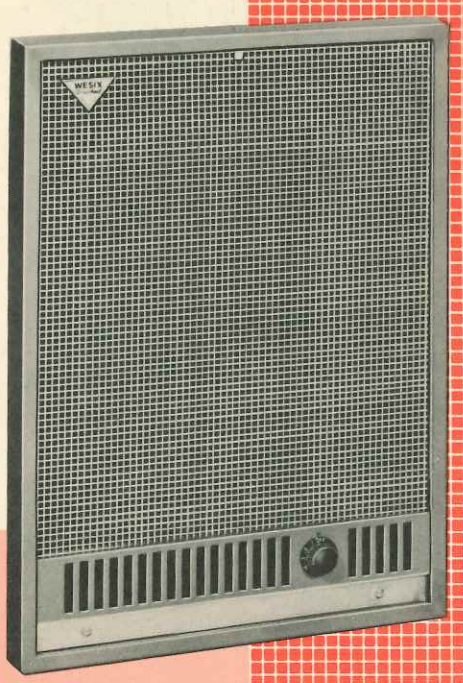

SPECIFICATIONS

Catalog No.	Watts	Shipping Wt.	Width of Wall Opening (Inches)	Height of Wall Opening (Inches)	Width of Heater Overall	Height of Heater Overall
15WFR	1500	16 lb.	9⅞	20¼	12½	23
20WFR	2000	22 lb.	14¼	20¼	16¾	23
25WFR	2500	22 lb.	14¼	20¼	16¾	23
30WFR	3000	30 lb.	22¾	20¼	25¼	23
40WFR	3750	30 lb.	22¾	20¼	25¼	23

Standard finish: Driftwood
Standard voltage: 240-250 AC.
Heater depth: 4″ To order for surface mounting, add catalog suffix "S".

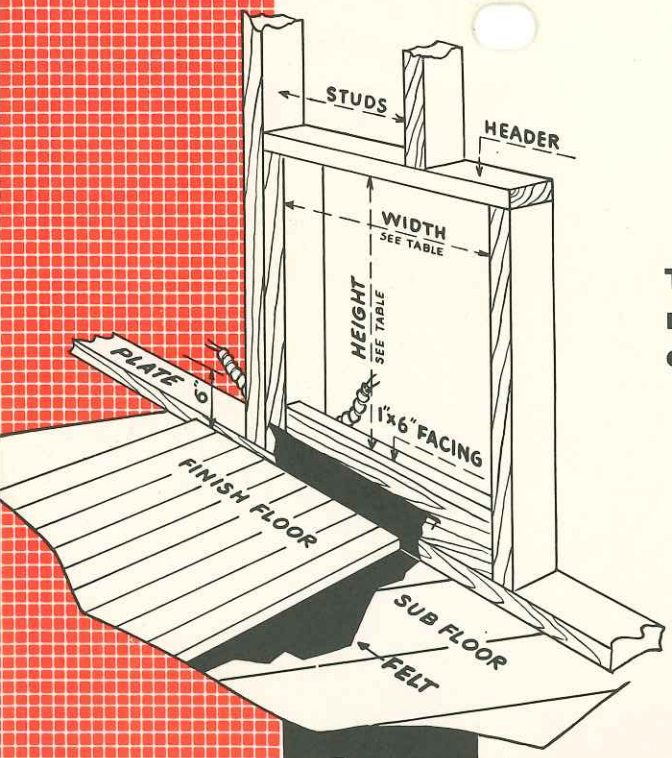

THREE-IN-ONE WESIX WALL HEATERS

INSTALLED THREE WAYS TO SUIT ANY CONSTRUCTION PROBLEM

All Wesix and Wesix-Ionix wall heaters may be ordered with recessed heater shell, surface mounting box, or with boxes shipped separately from frame and inner assembly. The same mounting boxes will accommodate Ionix Wall Convectors, Radiant-Convection, Standard Radiant or Fan Type heaters.

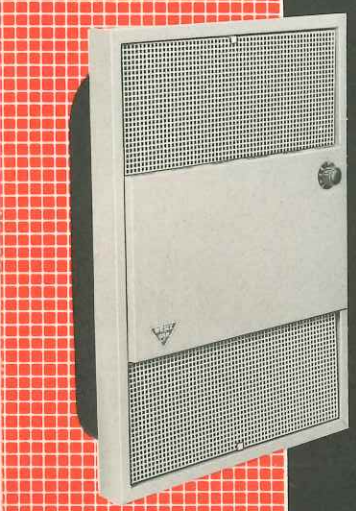



RECESSED MOUNT

Heater shell may be mounted during rough-in, spacing out flange from stud edge to depth of wall finish or by mounting into preconstructed frame after all wall finish and decoration has been completed. Exclusive slide-away connection box makes wiring a cinch.

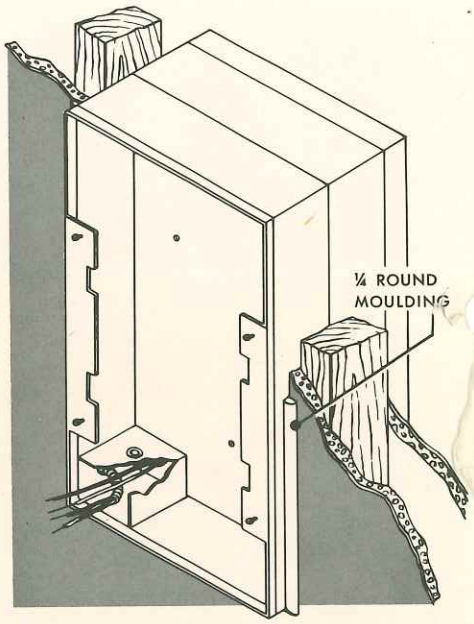

BACK TO BACK MOUNT

Make one circuit do the work of two and solve the problem of adjoining rooms which need the same wall space for heater installation. Wesix wall boxes fasten together easily and are wired through access holes to provide the convenience of "dual-wall" construction. (Available factory-assembled to suit local requirements.)

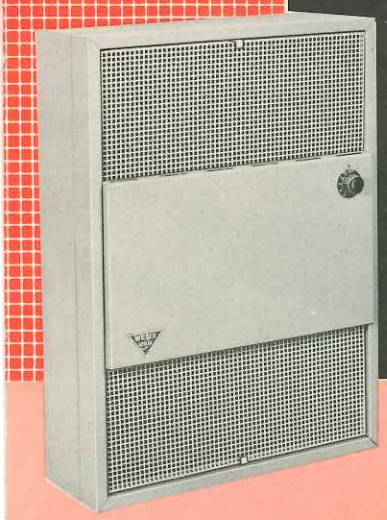



SURFACE AND SEMI-RECESSED MOUNT

The Wesix surface box attaches in seconds to any wall, even concrete or masonry. For wall of less than 4 inches the same box may be recessed to any depth desired.

IMPORTANT

Wesix Ionix Wall Convectors should not be located closer than 5 inches from adjacent walls and partitions and Radiant Ionix and Standard heaters not closer than 10 inches.

SPECIFICATIONS

Recessed Shell Catalog Number	Wall Opening Width (In.)	Surface Box Catalog No.	Over All or Wall Opening Width (In.)	For Heater Catalog No's.
R-1	9⅞	S-1	12½	15CIX, 15WFR, 15WIX, B15WIX
R-2	14¼	S-2	16¾	20CIX, 25CIX, 20W[illegible] 25WIX, 20WFR, 2[illegible] 30DF, 40DF, 50DF
R-3	22¾	S-3	25¼	30CIX, 40CIX, 30WIX, 40WIX, 30WFR, 40WFR

Height of wall opening for recessed shell, 20¼ inches. Standard finish, matte black.
Height over all of surface box, 23 inches. Standard finish, Driftwood enamel.

To order for surface mounting, add catalog suffix "S".

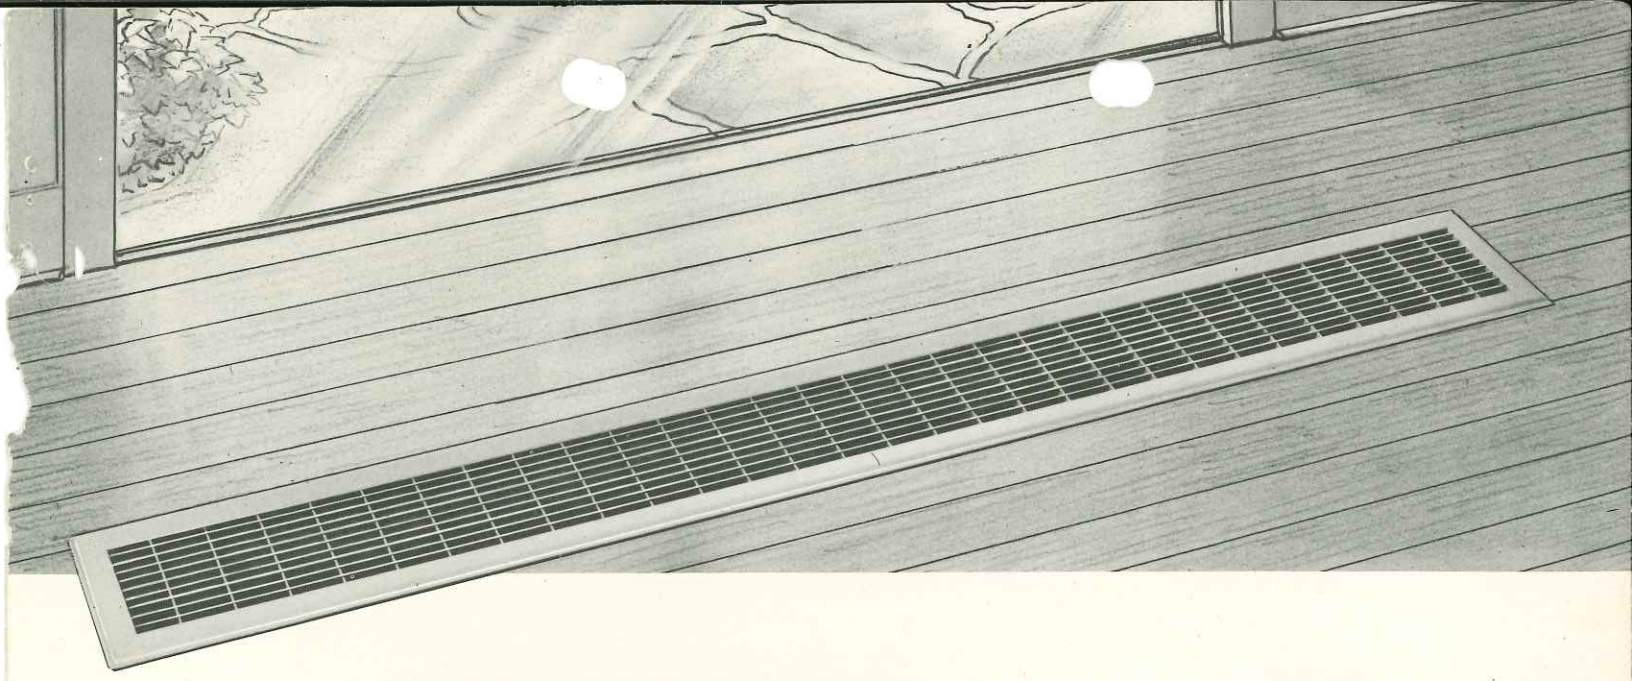

PERIMETER CONVECTORS

New Wesix Perimeter convectors provide the luxury of modern perimeter heating along floor-to-ceiling glass walls, heavily draped walls, and other locations where baseboard installations are not practical. Perimeter convectors feature an exclusive slim grille with double the strength of conventional air outlets-*plus* low grille temperature from exclusive double-draft natural-circulation action.

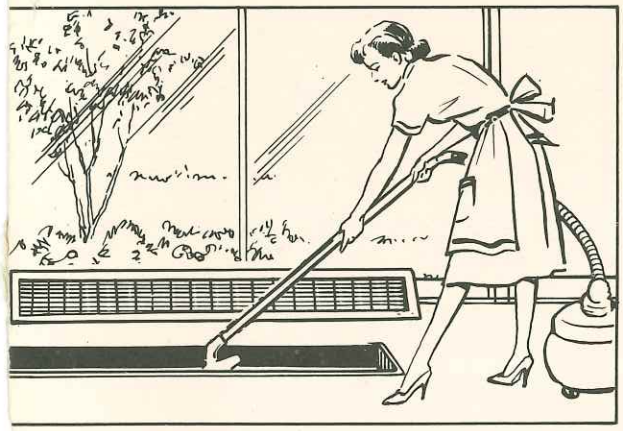

EASY CLEANING

Don't turn a screw, don't throw a switch, just lift out grille and exclusive Wesix plug-away construction exposes the entire box interior to your broom or vacuum.

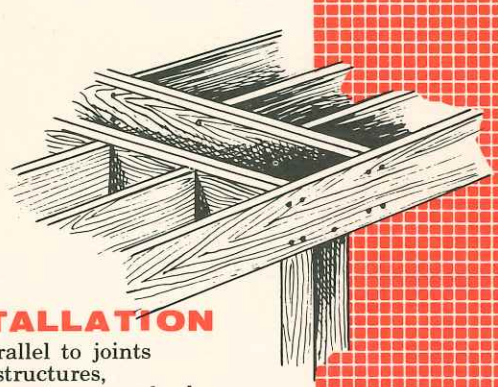

EASY INSTALLATION

Easily installed parallel to joints in new or existing structures, Wesix perimeter convectors can also be installed at right angles to joists as shown in the sketch. Guaranteed five years against element failure.

Listed and Approved by Underwriters' Laboratories, Inc.

SPECIFICATIONS

Cat. No.	Watts	Approximate Ship. Weight	Floor Open. Length	Open. Width	Grille Overall Length	Grille Overall Width
5F-36	1250	50 lbs.	36 5/8	5 1/8	38 3/8	7
5F-53	2000	78 lbs.	53 1/8	5 1/8	54 7/8	7
6F-53	3000	85 lbs.	53 1/8	6 1/2	54 7/8	8 1/2

Standard Finish: Driftwood
Standard Voltage: 240/250 AC
Depth of heater box: 8"

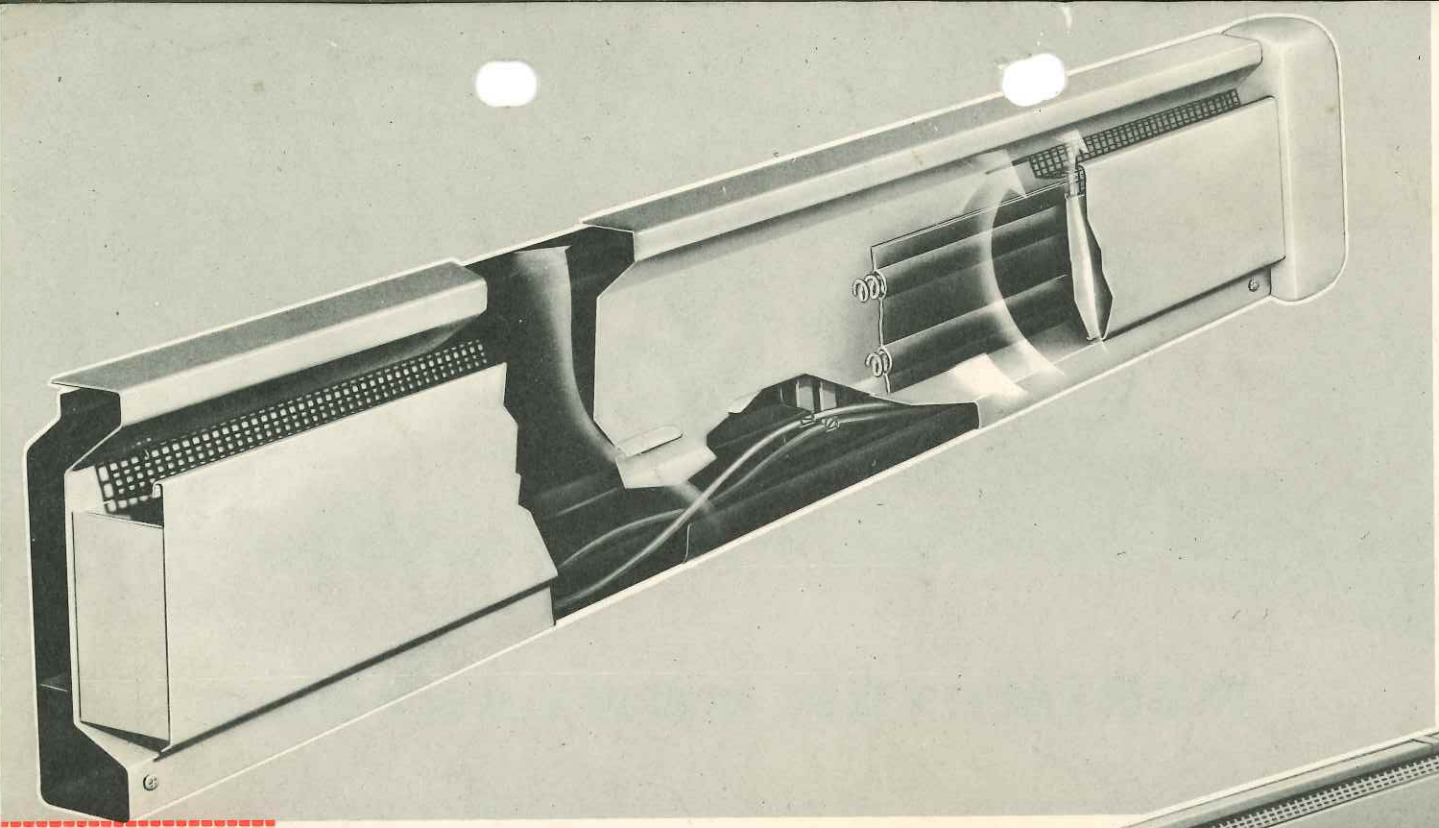

CUSTOM

SERIES CBB

RETURN TO
DESIGN DIV.

WESIX

ECONOMIZER

SERIES CBE

BASEBOARD PANELS

Wesix baseboards surround a room in a blanket of comfort—keep drafts out—keep floors warm. Exclusive Monofin elements mean instant response, are streamlined to speed airflow and stay clean and dust-free. Another Wesix exclusive, patented triple airflow means low front panel temperature and greater heating efficiency than any other baseboard. To provide the world's most versatile baseboard heating, Wesix Monofin baseboard is available in two separate styles:

CUSTOM For perfect heating system design Wesix *Custom* Baseboard provides precision modules to make it easy for the heating contractor or engineer to design the heating system for each installation and to suit every heating problem.

ECONOMIZER Without sacrificing quality, performance, or attractive appearance, Wesix *Economizer* Baseboard saves installation dollars, comes pre-assembled and pre-wired with sensitive built-in thermostat.